


D237/238/239 & CD237/238/239 Series, Vacuum – 2/2 Normally Closed

Specifications	
Function (single acting)	 Flow direction overseat 1 → 2
Maximum Viscosity	Max. 21cST (3 °E)
Body Material (Std)	Brass CW617N (EN 12165)
Flange	Stainless Steel 1.4305 EN 10088 (AISI 303)
Additional Flange (HEX 30)	Brass CW614N (EN 12164)
Tube	Stainless Steel AISI 304
Plunger	Stainless Steel 1.4106 EN 10088 (AISI 430F)
Top Stop	Stainless Steel 1.4105 EN 10088 (AISI 430F)
Springs	Stainless Steel AISI 302
Seal Material (Std)	NBR
Connection Type (Std)	G parallel thread (ISO 228-1)
Shading Ring	Copper
Electrical Characteristics	
High Power Coil Voltage DC (=)	24 V
High Power Coil Voltage AC 50 Hz (~)	24 V, 110 V, 230 V
High Power Coil Voltage AC 60 Hz (~)	24 V, 120 V, 240 V
Voltage Tolerance	+10% to -15% (AC)
	+10% to -5% (DC)
Duty Cycle	100% ED
Protection Class	IP65 (EN 60529) with plug and gasket correctly fitted *
Electrical Connection	to EN 175301 - 803 - A (ex DIN 43650)
Coil Insulation	Class H 180 °C
Power Rating (High Power)	AC 25 VA (holding) AC 50 VA (inrush) DC 22 W

Features and Benefits

- Direct Acting
- Robust construction for industrial applications
- Configuration suitable for vacuum
- Stainless steel AISI 430F operators with low residual magnetism
- Coils tested 100% in compliance to RoHS directive and to relevant international standards
- Choice of high quality seal materials
- Response time 5 to 25 ms




Pipe Size	Cv (gpm)	Kv (m³/h)	OPD (bar)		Orifice (mm)	Seal Material	Valve Code
			AC Voltages	DC Voltages			
¼"	1.49	1.27	0 to -0.95	-	10.5	NBR EPDM	D237DBU1 D237DEU1
⅜"	1.68	1.44	0 to -0.95	-	10.5	NBR EPDM	D238DBU1 D238DEU1
½"	1.76	1.50	0 to -0.95	-	10.5	NBR EPDM	D239DBU1 D239DEU1
¼"	1.49	1.27	-	0 to -0.95	10.5	NBR EPDM	C D237DBU1 C D237DEU1
⅜"	1.68	1.44	-	0 to -0.95	10.5	NBR EPDM	C D238DBU1 C D238DEU1
½"	1.76	1.50	-	0 to -0.95	10.5	NBR EPDM	C D239DBU1 C D239DEU1

Options Available

Seal Material ¹ and Media Temperature Range	Media	Ambient Temperature Range	
		Min	Max
NBR 60 shore (-10 °C to +90 °C)	Water, oil, air	-10 °C	+50 °C
EPDM (-10 °C to +120 °C)	Water, hot water	-10 °C	+50 °C

¹ See corrosion reference guide and sealing solutions for material compatibility. Other seals material on request.

D237/238/239 & CD237/238/239 Series, Vacuum – 2/2 Normally Closed

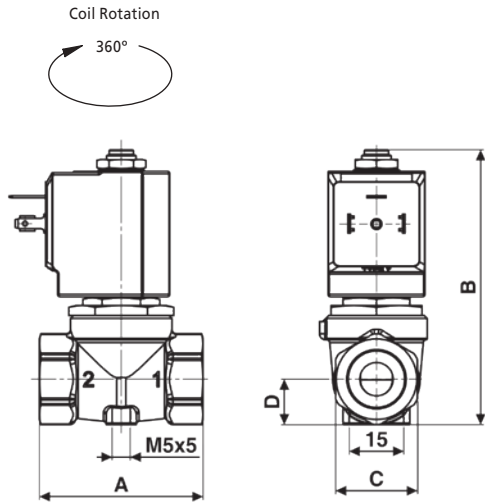

Preferred Valve Mounting Options



Pipe Size	A	B	C	D	Weight (kg)
1/4" - 3/8" - 1/2"	54	89	HEX 27	15	0.45

Dimensions (mm)

Solenoid enclosures

7-K1 & 7-Z1 Type Coil - Insulation class H

External material: PPS (glass fiber & mineral filled)
 Electrical connection: DIN EN 175301-803 form A
 Winding insulation: Class H (E180)
 Enclosure classification: Conforms to IP65 (according to EN 60529) with plug and gasket correctly fitted*



* Plug and gasket not supplied as standard, must be ordered separately.

Type 600 011- Plug

Rated Voltage (max.): 250 VAC / 300 VDC
 Nominal Current: 10A (rated) / 16A (max)
 Wire cross-section: 1.5 mm² max
 Cable Entry: PG9 (6 to 8 mm)
 Enclosure classification: Conforms to IP65 (according to EN 60529) with supplied gasket
 Insulation class: group C- VDE 0110
 Housing colour: black
 UL approved, file No: E205538



Coding chart

Main Valve Assembly

Valve Type
D AC version
CD DC version

Pipe Size
7 1/4"
8 3/8"
9 1/2"

Seals
E EPDM
B NBR

Option
w/o option

Coil options

Voltage / Frequency - Class H, High Power
72Z1 24 VDC
72K1 24 V / 50/60 Hz
74K1 110 V / 50 Hz - 120 V / 60 Hz
77K1 230 V / 50 Hz - 240 V / 60 Hz

Plug

Plug
w/o plug
0A1 c/w plug

•	2	3	•	D	•	U	1	•	•	•	•	•	•	•	•	•
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product coding example:

D238DEU1 77K1
 3/8" G, auto operation, brass body, EPDM seals, 10.5 mm orifice, 230 V / 50 Hz - 240 V / 60 Hz, without plug.